



**MACHINE  
GREATNESS™**

# PUMA V400P



---

**High Productivity  
Vertical  
Turning Center**

---

**PUMA V400P**  
PUMA V400P


---

ver. EN 170720 SU

# PUMA V400P

PUMA V400P is vertical turning center that has maximized productivity & serviceability, using roller type LM guide for all axis, so increased rapid traverse, acceleration and deceleration.

## Rigid structure for improving productivity

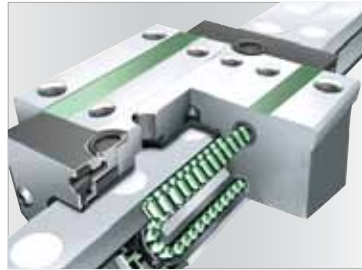

Roller type LM guide and upgraded servo motor, based on meehanite cast iron bed with rigid heavy-rib structure, optimized for improving productivity

Rapid Traverse (X / Z axis)

**24 m/min**

Power of axis motor


X axis **3 kW**  
(4.0 Hp)

Z axis **7 kW**  
(9.4 Hp)

## The result of increasing productivity




### Machining time for brake disc

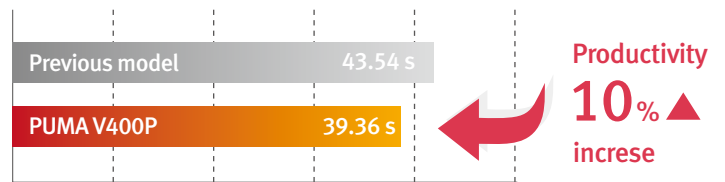

\* Test result by own standard.

### Machining range




**A** : Max. turning diameter

**496 mm**  
(19.5 inch)

**B** : Max. turning length

**461 mm**  
(18.1 inch)

## Main Spindle

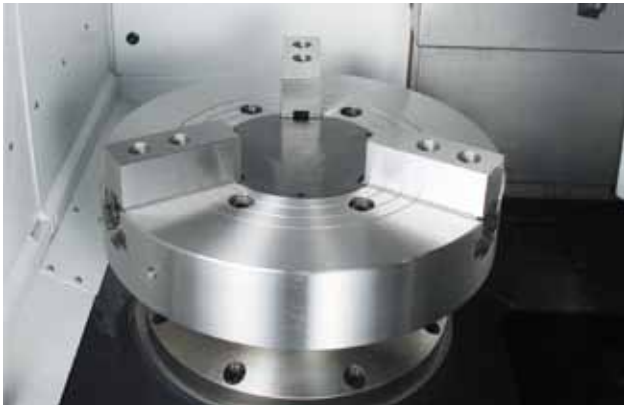


The cartridge type spindle with A2#8 spindle nose assures high capability and easy of maintenance. Especially rigid coupled bearing assembly is to support heavy weight workpiece and reduces thermal growth in long run operation.

Max. spindle speed

**3000 r/min**

Spindle motor power (30 min)

**22 kW (29.5 Hp)**

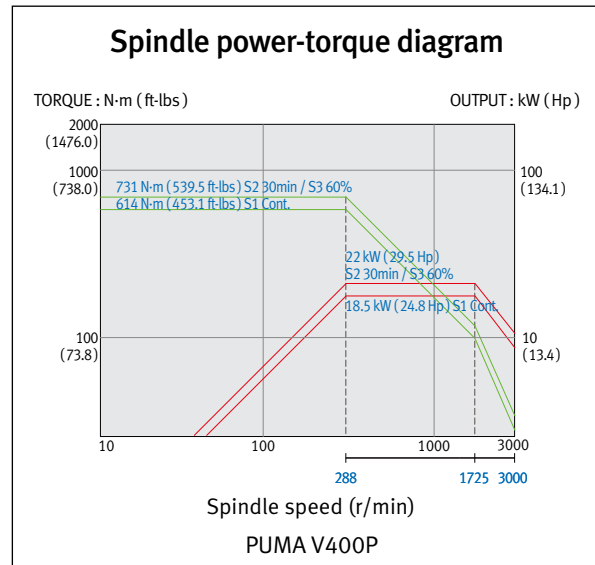

## Turret



Index time  
(1-station swivel)

**0.15 s**


No. of tool station

**12 ea**

The large 12 station heavy duty turret features a large diameter Curvic coupling and heavy duty design with unsurpassed rigidity. Turret rotation, acceleration and deceleration are all controlled by a reliable high torque servo motor.

Unclamp and rotation are virtually simultaneous. Its fast index response reduces the total cycle time Double-

## Safety Design

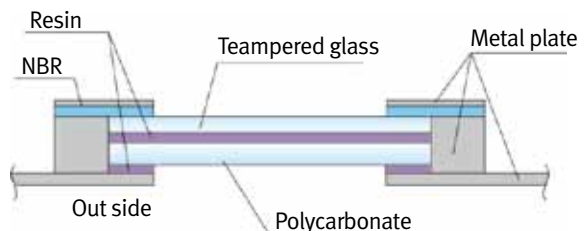

The operator safety can be enhanced through the front door with its shock absorbing laminated glass and double panel construction. The windows without grating also provide a clear view of the machine inside.

## Machine Specification

Feature		Unit	PUMA V400P
Capacity	Swing over bed	mm (inch)	610 (24.0)
	Swing over saddle	mm (inch)	500 (19.7)
	Recom. Turning diameter	mm (inch)	305 (12.0)
	Max. Turning diameter	mm (inch)	496 (19.5)
	Max. Turning length	mm (inch)	461 (18.1)
	Chuck size	mm (inch)	305 (12)
Travels	Travel distance	X-axis	268 (10.6)
		Z-axis	488 (19.2)
Feedrates	Rapid Traverse Rate	X-axis	24 (0.9)
		Z-axis	24 (0.9)
		Max. Spindle speed	r/min
Main spindle	Spindle nose	ASA	A2-8
	Spindle bearing diameter (Front)	mm (inch)	130 (5.1)
	Spindle through hole	mm (inch)	90 (3.5)
	No. of tool stations	ea	12
Turret	OD tool size	mm (inch)	25 x 25 (1.0 x 1.0)
	Max. boring bar size	mm (inch)	50 (2.0)
	Turret Indexing time (1 station swivel)	s	0.15
Motors	Main spindle motor power (30min./cont.)	kW (Hp)	22 / 18.5
	Coolant pump motor power	kW (Hp)	0.4 (0.5)
Power source	Electric power supply (rated capacity)	kW (Hp)	42.2
Machine Dimensions	Length	mm (inch)	1455 (57.3)
	Width	mm (inch)	2075 (81.7)
	Height	mm (inch)	3210 (126.4)
	Weight	kg (lb)	6000 (13227.5)
NC system			DOOSAN-FANUC i

### Standard Feature

- Coolant supply equipment
- Full enclosure chip and coolant shield
- Hand tool kit, including small hand tool for operations
- Hydraulic chuck & actuating cylinder
- Hydraulic power unit
- Leveling jack screw & plates
- Lubrication equipment
- Soft jaws (total)
- Standard tooling kit (tool holders & boring sleeve)
- Work light

### Optional Feature

- Air blast for chuck jaw cleaning
- Automatic door
- Automatic door with safety device
- Chip conveyor & Chip bucket
- Coolant flushing
- Dual chucking pressure
- Hardened & ground jaws
- Manual tool presetter
- Oil skimmer
- Signal tower (yellow, red, green)
- Chuck clamp confirmation
- Special chucks



## Doosan Machine Tools

<http://www.doosanmachinetools.com>

[www.facebook.com/doosanmachinetools](https://www.facebook.com/doosanmachinetools)

[www.youtube.com/c/DoosanMachineToolsCorporation](https://www.youtube.com/c/DoosanMachineToolsCorporation)

**MACHINE  
GREATNESS™**

#### Head Office

Yeonkang Bldg., 6th FL., 270, Yeonji-dong,  
Jongno-gu, Seoul, Korea  
Tel +82-2-3670-5345 / 5362  
Fax +82-2-3670-5382

#### Doosan Machine Tools China

Room 101,201,301, Building 39 Xinzhuan Highway  
No.258 Songjiang District,China Shanghai(201612)  
Tel +86-21-5445-1155  
Fax +86-21-6405-1472

#### Doosan Machine Tools Japan

#2412, Mita Kokusai Bldg. 1-4-28 Mita,  
Minato-ku, Tokyo 108-0073, Japan  
Tel +81-3-5730-9013  
Fax +81-3-5730-9016

#### Doosan Machine Tools America

19A Chapin Rd., Pine Brook, NJ 07058, U.S.A.  
Tel +1-973-618-2500  
Fax +1-973-618-2501

#### Doosan Machine Tools Europe

Emdener Strasse 24, D-41540 Dormagen, Germany  
Tel +49-2133-5067-100  
Fax +49-2133-5067-111

#### Doosan Machine Tools India

106 / 10-11-12, Amruthahalli, Byatarayanapura,  
Bellary road, Bangalore-560 092, India  
Tel +91-80-4266-0122 / 121 / 100

\* For more details, please contact Doosan Machine Tools.

\* The specifications and information above-mentioned may be changed without prior notice.

\* Doosan Machine Tools Co., Ltd. is a subsidiary of MBK Partners. The trademark  **DOOSAN** is used under a licensing agreement with Doosan Corporation, the registered trademark holder.